

Manually or pneumatically actuated Piston pumps

For oil and fluid grease
For use in SKF MonoFlex single-line centralized lubrication systems



These manually or pneumatically actuated piston pumps were designed for intermittently operated single-line centralized lubrication systems with piston distributors.

They contain the valve set required for pressure relief and limitation.



Pump overview

Order No.	Lubricant		Displacement [cm ³ /stroke]	Reservoir capacity [liter]	Drive		Fill level switch	Page
	Oil	Fluid grease			manual	pneumatic		
POE-15-0.5	•		15	0,5	•			4
POE-15-1.0	•		15	1,0	•			4
POE-15-1.0W	•		15	1,0	•		•	4
POE-15-1.7	•		15	1,7	•			4
POE-15-1.7W	•		15	1,7	•		•	4
POEP-15-0.5	•		15	0,5		•		4
POEP-15-1.0	•		15	1,0		•		4
POEP-15-1.0W	•		15	1,0		•	•	4
POEP-15-1.7	•		15	1,7		•		4
POEP-15-1.7W	•		15	1,7		•	•	4
P-289	•		10	1,5		•		8
PW-289	•		10	1,5		•	•	8
PEU-99-S3	•		50	3		•		10
PFE-15-0.5		•	15	0,5	•			6
PFE-15-1.0		•	15	1,0	•			6
PFE-15-1.0W2		•	15	1,0	•		•	6
PFE-15-1.7		•	15	1,7	•			6
PFE-15-1.7W2		•	15	1,7	•		•	6
PFEP-15-0.5		•	15	0,5		•		6
PFEP-15-1.0		•	15	1,0		•		6
PFEP-15-1.0W2		•	15	1,0		•	•	6
PFEP-15-1.7		•	15	1,7		•		6
PFEP-15-1.7W2		•	15	1,7		•	•	6
PF-289		•	10	1,5		•		8
PFW-289		•	10	1,5		•	•	8
PEF-99W(-S1/S2/S3)		•	50	3		•	•	10
PEF-90	•	•	48	3		•		10
PEU-99(-S2)	•	•	50	3		•		10

Commissioning

To commission the product, fill the reservoir with lubricant and actuate the pump at intervals of 5 – 10 seconds until lubricant discharges at all lubrication points. A properly installed system will ventilate itself without operator intervention. The venting process is facilitated by:

- Opening the ends of the main pipes until bubble-free oil or fluid grease discharges from the ends.
- Filling long lubrication point lines, especially for distributor ports with low metering volumes, before connecting to the lubrication points.

Maintenance

- 1 Check the oil/grease level and fill the oil reservoir in time. Use the lubricant in accordance with the information provided by the manufacturer. Always use a screen filter when refilling oil.
- 2 After using the machine for an extended period of time, inspect all pipe connections for leakage and actuate the pump to check whether lubricant discharges at all lubrication points.

Only use original SKF spare parts.

CAUTION

The important information on product usage located on the back cover applies to all systems described in this brochure.

Pump overview



POE/PFE piston pumps

Lubricant **Oil** Page 4–5
Fluid grease Page 6–7

Actuation **manual**
 Fill level monitoring **optional**
 Reservoir capacity **0,5; 1,0 or 1,7 liters**
 Displacement **15 cm³/stroke**



POEP/PFEP piston pumps

Lubricant **Oil** Page 4–5
Fluid grease Page 6–7

Actuation **pneumatic**
 Fill level monitoring **optional**
 Reservoir capacity **0,5; 1,0 or 1,7 liters**
 Displacement **15 cm³/stroke**



P/PF/PW/PFW piston pumps

Lubricant **Oil** Page 8
Fluid grease Page 8

Actuation **pneumatic**
 Fill level monitoring **optional**
 Reservoir capacity **1,5 liters**
 Displacement **10 cm³/stroke**
15 cm³/stroke



PEF/PEU piston pumps

Lubricant **Oil** Page 10
Fluid grease Page 10

Actuation **pneumatic**
 Reservoir capacity **3 liters**
 Displacement **48 cm³/stroke**
50 cm³/stroke

POE(P) piston pumps for oil, manually or pneumatically actuated

Manually actuated



Pneumatically actuated



Order No. Overview

Order No.	Reservoir capacity [liter]	Drive		Fill level switch
		manual	pneumatic	
POE-15-0.5	0,5	•		
POE-15-1.0	1,0	•		
POE-15-1.0W	1,0	•		•
POE-15-1.7	1,7	•		
POE-15-1.7W	1,7	•		•
POEP-15-0.5	0,5		•	
POEP-15-1.0	1,0		•	
POEP-15-1.0W	1,0		•	•
POEP-15-1.7	1,7		•	
POEP-15-1.7W	1,7		•	•

Technical data

Pump

Drive	manual or pneumatic
Reservoir capacity	0,5; 1,0 and 1,7 liters
Reservoir material	Plastic (PP), transparent
Outlets	G ¹ / ₄ , on left or right
Compressed air connection	G ¹ / ₄ (on pump bottom)
Operating pressure, max.	30 bar (manual. actuated) 60 bar (pneum. actuated)
Displacement per stroke	15 cm ³
Transmission ratio for pneum. pumps	10:1

Ambient temperature 0 to +60 °C


Lubricant Mineral, synthetic, and environmentally compatible oils, operating viscosity 20 to 1500 mm²/s

Fill level switch for monitoring the min. oil level

Function	Contact opens at minimum fill level
Switching voltage, max.	42 V DC
Switching capacity, max.	50 W
Plug	4-pin M12x1 circular plug
Mounting position	1, 2 or 3 possible (2 on delivery)

Diagram 1


Pressure diagram for pneumatic drive

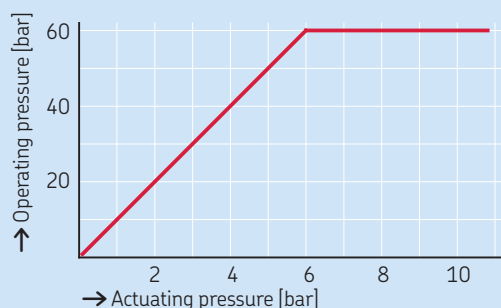

Note

For a hydraulic system pressure of >45 bar, use cutting-sleeve screw unions conforming to DIN 2353 or plug connectors as connection fittings.

For fittings and accessories, see brochure 1-0103-EN; for connector systems, see brochure 1-0103-1-EN.

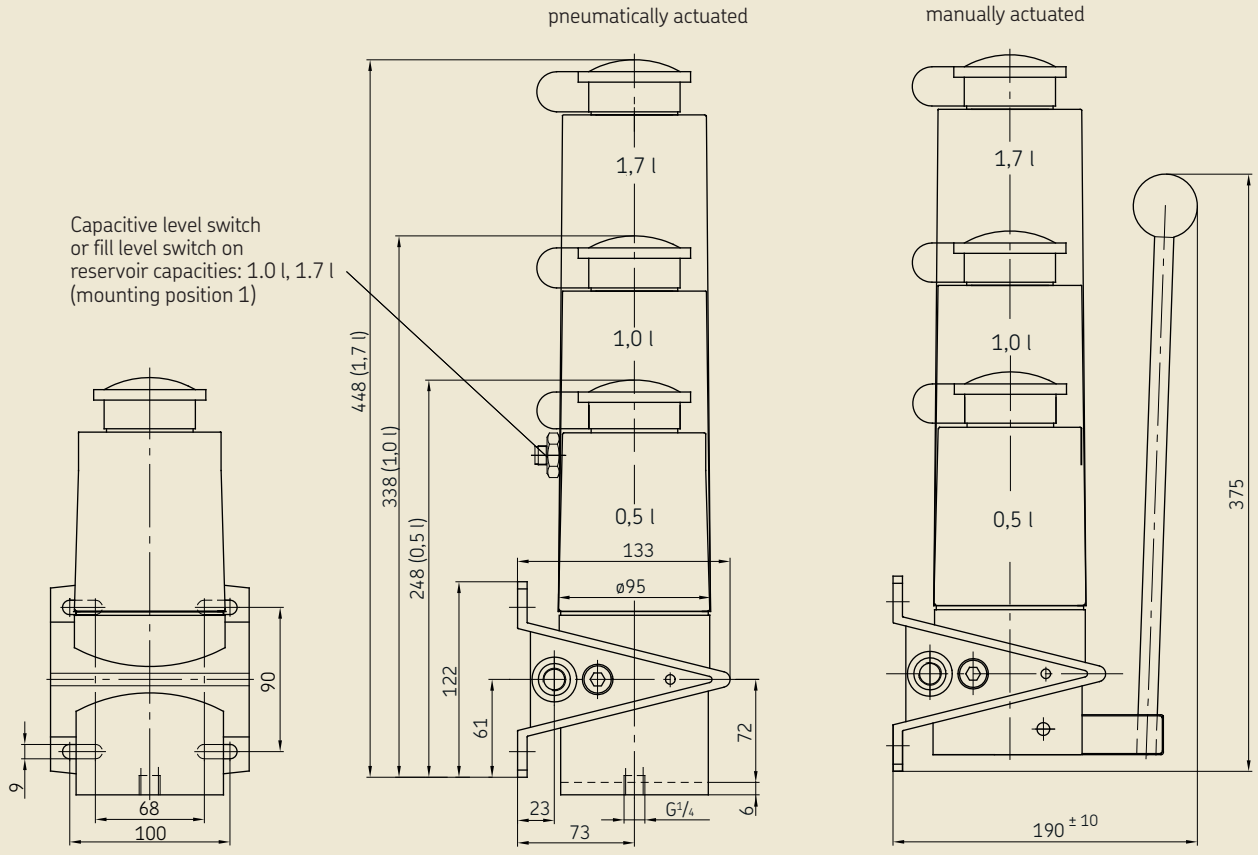

Capacitive level switch or fill level switch on reservoir capacities: 1.0 l, 1.7 l (mounting position 1)

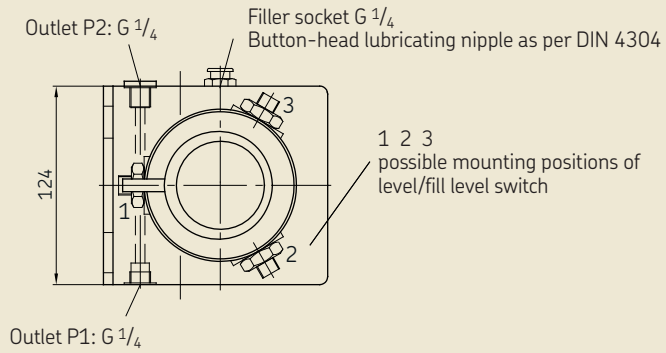


Fig. 2

Hydraulic layout for POE (manual)

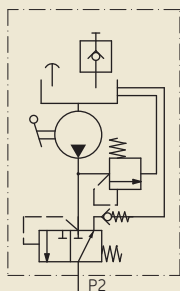


Fig. 3

Hydraulic layout for POEP (pneumatic)


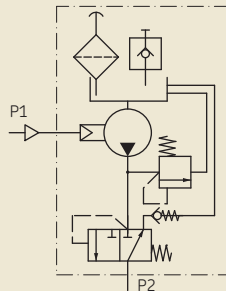


Fig. 4

Wiring diagram for fill level monitoring



PFE/PFEP piston pumps for fluid grease, manually or pneumatically actuated

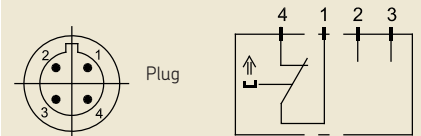


Order No. Overview

Order No.	Reservoir capacity [liter]	Drive		Fill level switch
		manual	pneumatic	
PFE-15-0.5	0,5	•		
PFE-15-1.0	1,0	•		
PFE-15-1.0W2 ¹⁾	1,0	•		•
PFE-15-1.7	1,7	•		
PFE-15-1.7W2 ¹⁾	1,7	•		•
PFEP-15-0.5	0,5		•	
PFEP-15-1.0	1,0		•	
PFEP-15-1.0W2 ¹⁾	1,0		•	•
PFEP-15-1.7	1,7		•	
PFEP-15-1.7W2 ¹⁾	1,7		•	•

¹⁾ Level switch connection, 4-pin M8x1 circular plug, plug with 5 m cable, order No. 179-990-762

Technical data

Pump	
Drive	Manual or pneumatic
Reservoir capacity	0.5; 1.0 and 1.7 liters
Reservoir material	Plastic (PP), transparent
Outlets	G ¹ / ₄ , on left or right
Compressed air connection	G ¹ / ₄ (on pump bottom)
Operating pressure, max.	30 bar (manual. actuated) 60 bar (pneum. actuated)
Displacement per stroke	15 cm ³
Transmission ratio for pneum. pumps	10:1
Ambient temperature	0 to +60 °C
Lubricant	Fluid grease, NLGI Grade 000, 00
Fill level switch for monitoring the min. grease level	
Function	NPN, PNP/NO-contact - NC contact
Switching voltage, max.	10 to 36 V DC
Operating current at switching output	max. 150 mA
Protection class	IP 67
Connection	2 m PVC cable or 4-pin M8x1 circular plug
Mounting position	1, 2 or 3 possible (2 on delivery)

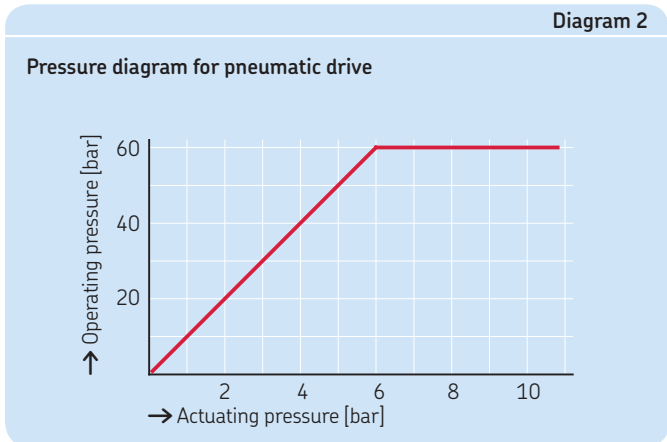

Note For a hydraulic system pressure of >45 bar, use cutting-sleeve screw unions conforming to DIN 2353 or plug connectors as connection fittings. For fittings and accessories, see brochure 1-0103-EN.

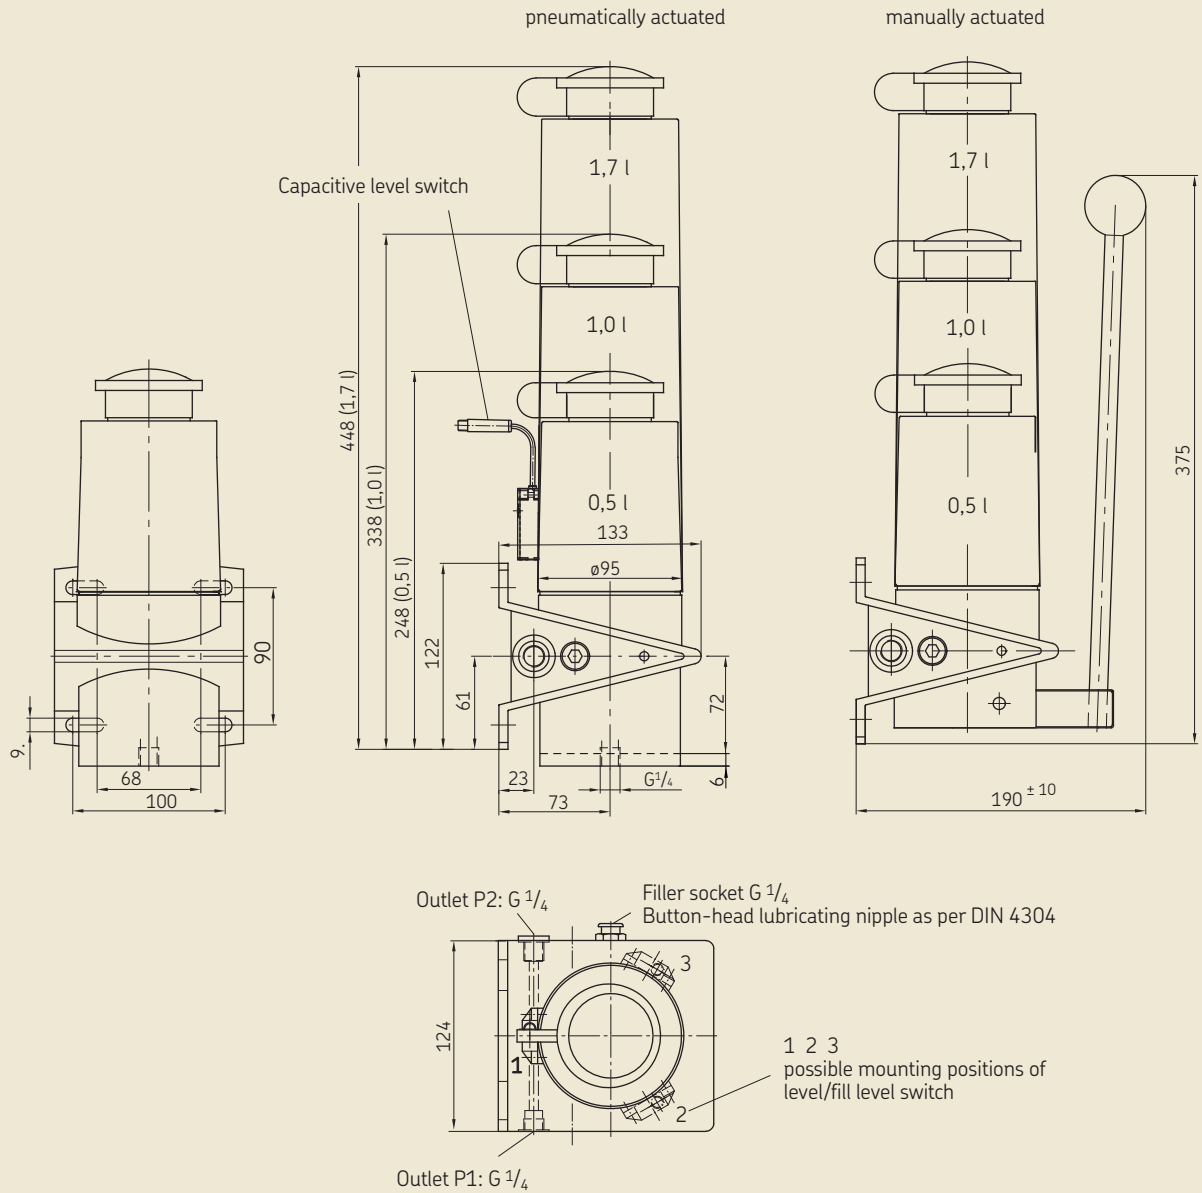


Fig. 6

Hydraulic layout for PFE (manual)

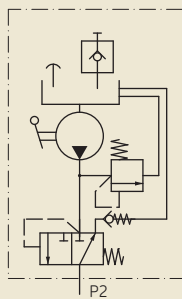


Fig. 7

Hydraulic layout for PFEP (pneumatic)


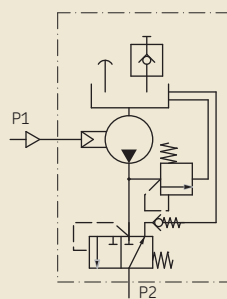


Fig. 8

Wiring diagram for fill level monitoring



P(F)(W)-289 piston pump for oil or fluid grease, pneumatically actuated

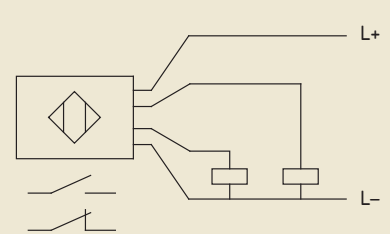

Order No. Overview

Order No.	Lubricant		Fill level switch	Fig.
	Oil	Fluid grease		
P-289	•			9
PW-289	•		•	11
PF-289		•		9
PFW-289		•	•	11

A pressure regulating valve, e.g. WVN200-6B40, with a cracking pressure of 40 bar must be used to protect the system.

Technical data

Pump

Drive	pneumatic
Reservoir capacity	1.5 liters
Operating pressure, max.	3.5 to 10 bar
Displacement per stroke	10 cm ³

Ambient temperature +10 to 40 °C
 Type of enclosure IP 54
 Lubricant Mineral, synthetic, and environmentally compatible oils, operating viscosity 20 to 1500 mm²/s or fluid grease, NLGI grades 000, 00

Fill level switch for monitoring the min. grease level

Function	1 changeover
Switching voltage, max.	230 V AC 230 V DC
Switching current max.	1.0 A 1.0 A
Breaking capacity max.	60 VA 40 W
Cable gland	PG11


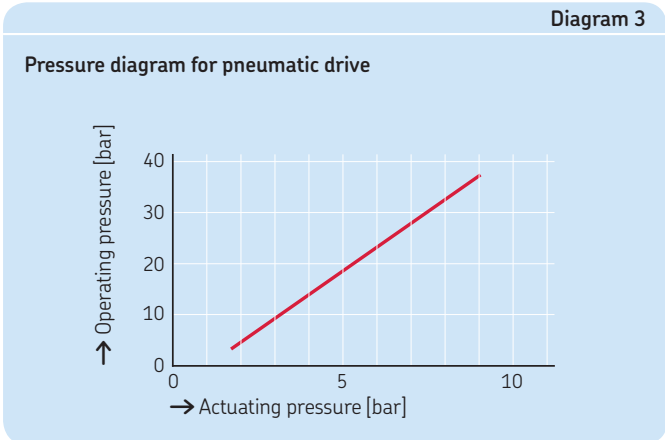


Fig. 9

P-289 / PF-289

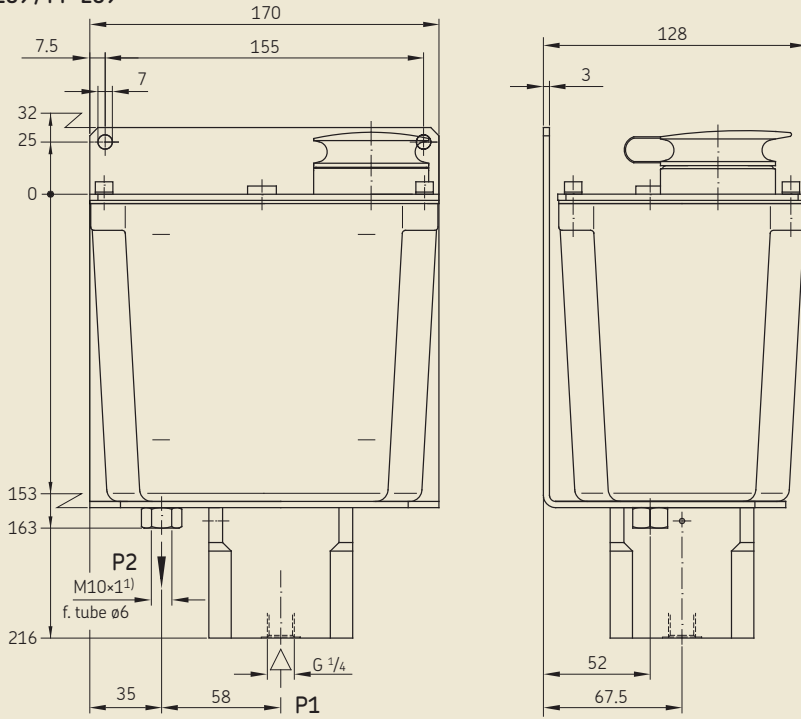

P1 = Compressed air connection
 P2 = Compressed air connection to system
 1) Anschluss mit Senkung für lötlöse Rohrverschraubung für Rohr ø6

Fig. 10

Hydraulic layout for PF-289


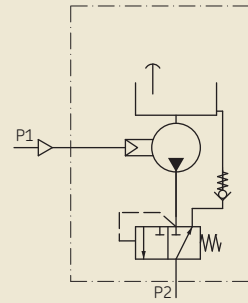


Fig. 11


PW-289 / PFW-289

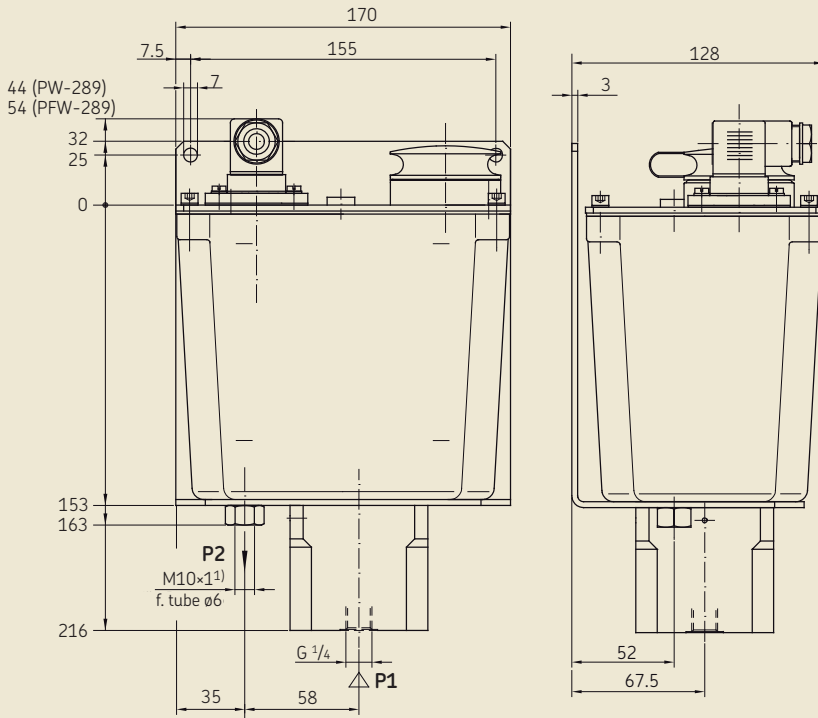

P1 = Compressed air connection
 P2 = Compressed air connection to system
 1) Anschluss mit Senkung für lötlöse Rohrverschraubung für Rohr ø6

Fig. 12

Hydraulic layout for PW-289

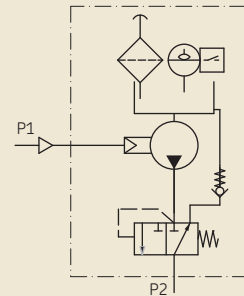

PEF-90 / PEF-99W / PEU-99 piston pump for oil or fluid grease, pneumatically actuated




Order No. Overview

Order No.	Lubricant			Fig.
	Oil	Fluid grease	Fill level switch	
PEF-90	•	•		13
PEF-99W			•	16
PEF-99W-S1	•		•	16
PEF-99W-S2	•		•	16
PEF-99W-S3	•		•	16
PEU-99	•	•		16
PEU-99-S2	•	•		16
PEU-99-S3	•			16

Technical data


Pump	
Drive	pneumatic
Reservoir capacity	3 litres
Operating pressure, max.	10 bar
Displacement per stroke	48 or 50 cm ³
Ambient temperature	-25 to +80 °C
Type of enclosure	IP 54
Lubricant	Mineral, synthetic, and environmentally compatible oils, operating viscosity 20 to 1500 mm ² /s or fluid grease, NLGI grades 000, 00
Fill level switch for monitoring the min. grease level	
Function	No-contact
Switching voltage, max.	10 to 35 V DC
Capacity	15 mA
Output current	400 mA

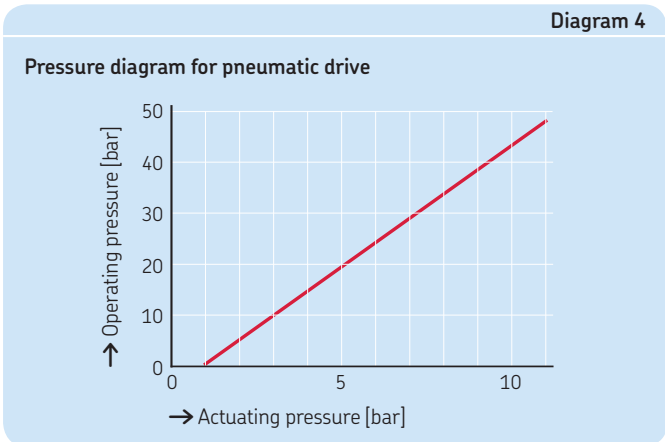

Note
For fittings and accessories, see brochure 1-0103-EN.

Fig. 13

PEF-90

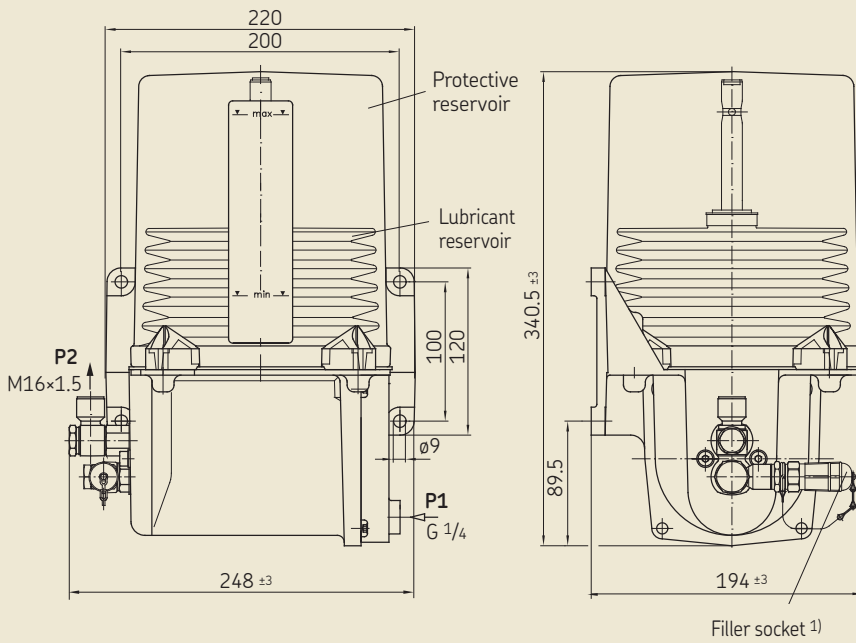

Filler socket 1)

P1 = for air main of compressed air reservoir
 P2 = for main line to system

1) Lubricant is filled via the filler socket using an external topping-up pump.
 The connecting cable of the topping-up pump must be equipped with a coupling socket, 995-001-500.
 Topping-up pump is available on request.

Fig. 14

Hydraulic layout for PEF-90


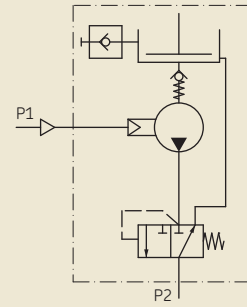


Fig. 16

PEF-99W-S3

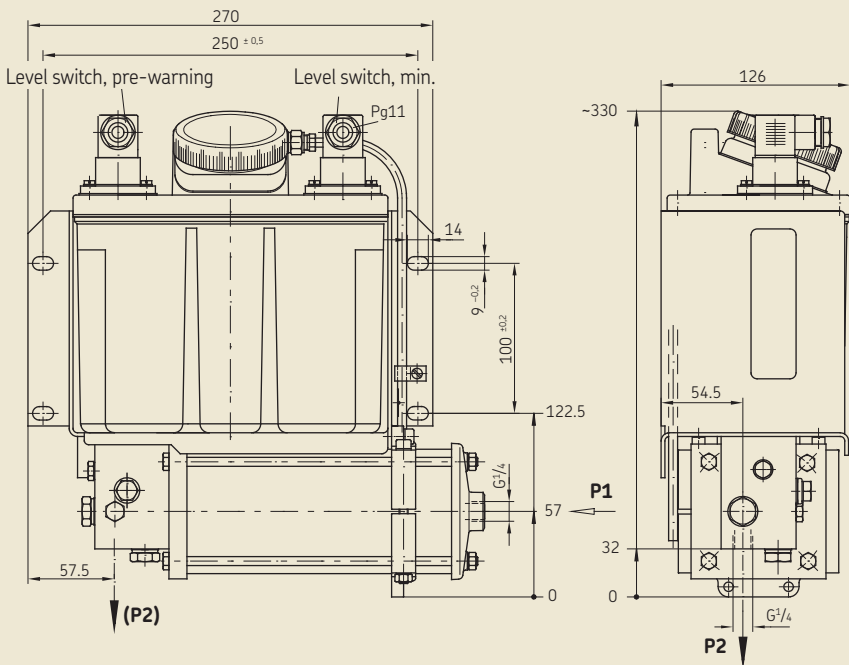



P1 = for air main of compressed air reservoir
 P2 = for main line to system

Pipe thread with counterbore for solderless pipe unions.

Fig. 15

Hydraulic layout for PEF-99W-S3

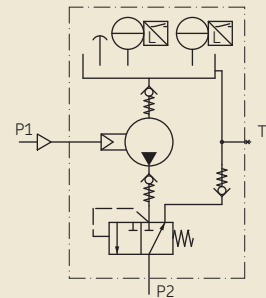

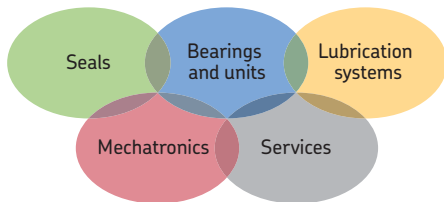

The Power of Knowledge Engineering

Drawing on five areas of competence and application-specific expertise amassed over more than 100 years, SKF brings innovative solutions to OEMs and production facilities in every major industry world-wide. These five competence areas include bearings and units, seals, lubrication systems, mechatronics (combining mechanics and electronics into intelligent systems), and a wide range of services, from 3-D computer modelling to advanced condition monitoring and reliability and asset management systems. A global presence provides SKF customers uniform quality standards and worldwide product availability.

! Important information on product usage

All products from SKF may be used only for their intended purpose as described in this brochure and the operating instructions. If operating instructions are supplied together with the products, they must be read and followed.

Not all lubricants can be fed using centralized lubrication systems. SKF can, on request, inspect the feedability of the lubricant selected by the user in centralized lubrication systems. Lubrication systems and their components manufactured by SKF are not approved for use in conjunction with gases, liquefied gases, pressurized gases in solution, vapors or such fluids whose vapor pressure exceeds normal atmospheric pressure (1 013 mbar) by more than 0,5 bar at their maximum permissible temperature.

In particular, we call your attention to the fact that hazardous materials of any kind, especially the materials classified as hazardous by EC Directive 67/548/EEC, Article 2, Para. 2, may only be filled into SKF centralized lubrication systems and components and delivered and/or distributed with the same after consultation with and written approval from SKF.

Further brochures

1-0103-EN *Fittings and Accessories*
 1-9201-EN *Transport of Lubricants in Centralized Lubrication Systems*

SKF Lubrication Systems Germany AG

Motzener Strasse 35/37
 12277 Berlin · Germany
 PO Box 970444 · 12704 Berlin · Germany

Tel. +49 (0)30 72002-0
 Fax +49 (0)30 72002-111

This brochure was presented by:

© SKF is a registered trademark of the SKF Group.

© SKF Group 2011

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB LS/P2 11218 EN · August 2011 · 1-1110-EN

This publication supersedes publication 1-0015-EN · 1-1111-EN

