


Flow limiter SP/SMB9

for mounting plates

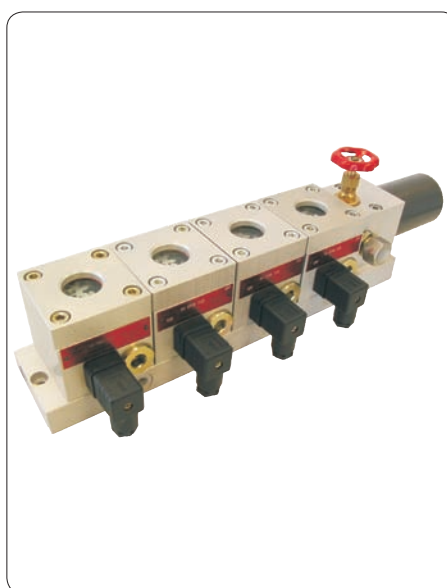

Flow limiters are used in large oil circulating lubrication systems. The task of a flow limiter is to divide up the volumetric flow of the main line into parallel individual volumetric flow quantities and to "limit" these according to requirements, or to keep them constant. The volumetric flow generated is independent of the system pressure and virtually independent of viscosity.

The SP/SMB9 flow limiter was developed specially for mounting plates. The advantage of this design is its simple and compact construction.

Using interchangeable plug-in nozzles, the volumetric flow of the flow limiter can be set stepwise from **0.09 to 8.18 l/min**. That makes it possible to adjust the volumetric flow rates at a later date.

The SP/SMB9 series comes with a visual/electronic gear wheel-type flow indicator with a specific flow of 12.0 ml per revolution of the gears.

Advantages

- **reliable**
perpetual dispensation of individual volume flows
 - self-adjusting metering, thus identic volume flows despite different back pressures.
 - wide viscosity range, virtually independent of temperature and viscosity, thus stable system constitution
- **easy system design**
The required volume flow and nozzle size are determined during the engineering phase.
- **space-saving installation**
thanks to a common base plate with only one inlet for up to 6 flow limiter.
- **easy start up**
Pre-adjusted volume flows enable short start up periods.
- **effective monitoring of volume flow with gear wheel-type flow indicator, with Hall sensor**
- **wide range of operation**
- **optional ATEX-version**
- **stable and reproducible measurement, no adjustment required.**

Design

The SP/SMB9 flow limiter consists of the following:

- flow limiter housing (with sensor)
- flow limiter regulating assembly (with control piston, plug-in nozzle and pressure spring)
- gear pair
- flow limiter cover (with sight glass, seals, plugs and fastening screws)
- baseplate.

The housing, gears and cover consist of an anodized aluminum alloy to ensure corrosion-resistance and low weight. A round glass disk conforming to DIN 8902 (pressed hard glass) is used for the sight-glass pane. The pane floats in the cover to avoid distortion and premature failure. The housing accommodates a sensor that is actuated by pin magnets embedded in the gear.

Mode of operation

With the flow limiter SP/SMB9 flow limiter, the total volumetric flow Q is divided up into individual flow lines Q , by the parallel layout of the volume limiter on the mounting plate. The system pressure, being the input pressure p_1 , is thus maintained for all flow limiters. Every flow limiter has a control piston with a plug-in nozzle as a differential pressure regulator.

The differential pressure ($p_1 - p_2$) at the interchangeable plug-in nozzle D_1 in the control piston is based on a balance of forces.

$$p_1 \cdot A = p_2 \cdot A + F \quad \text{resp.} \quad p_{1/2} = p_1 - p_2 = \frac{F}{A} = \text{constant}$$

It follows that:

The difference in pressure in front of and behind variable nozzle D_2 is held constant by a balance in pressure. The condition for this function is that the system pressure p_1 is always greater than the sum of the pressure drops in and after each flow limiter.



$$p_1 > p_{1/2} + p_3$$

For this reason the pump volume flow should exceed all individual flow quantities by approx. 15 %, i.e.,

$$Q = 1.15 \cdot (\sum Q_i).$$

The downstream gear wheel-type flow indi-

cator uses a dynamic pulse generator (24 V DC) to emit a continuous sequence of pulses proportional to the volumetric flow. The proportionality factor K_1 is derived from the swallowing capacity of one revolution of the gear pair ($K_1 = 12.0 \text{ ml/pulse}$). The sequence of pulses can be displayed and monitored by pulse-monitoring equipment, group monitoring units or a central evaluation station.

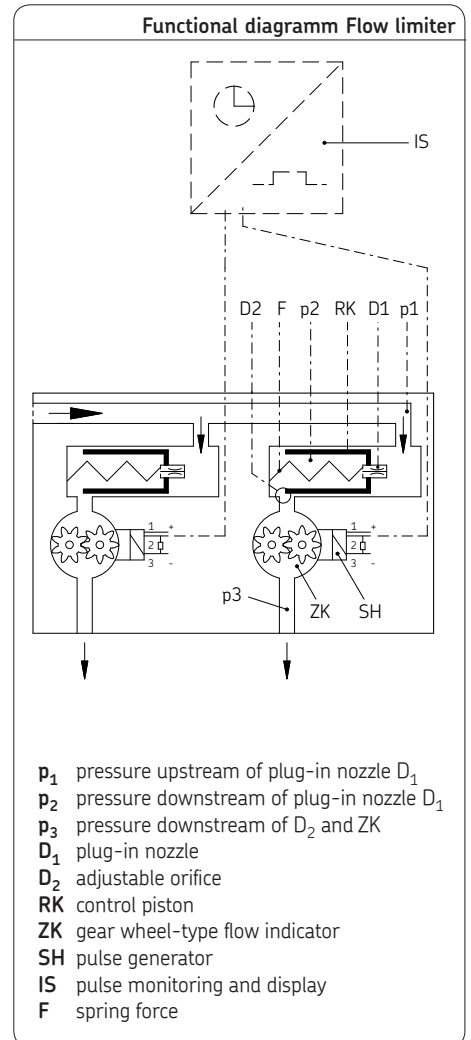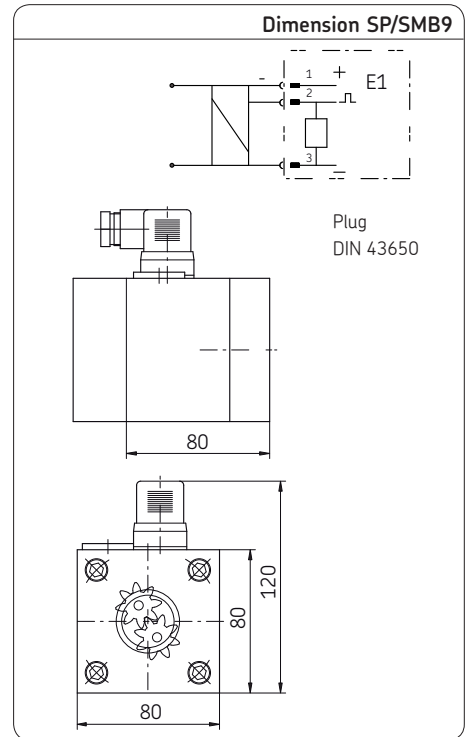

Technical Data


Flow limiter	
General information	
Type	2-way flow limiter valve with volumetric flow control
Application	for Mounting plates
Fitting position	any (make sure the filter is mounted in vertical position)
Ambient temperature range	0 bis + 70 °C
Material	AlCuPb F38, neutrally anodized
Weight	1.4 kg
Hydraulics	
Nominal volumetric flow	stepwise from 0.09 bis 8.18 l/min (see also related tables page 5)
Working pressure p_1	6 bis 50 bars
Required differential pressure between input pressure p_1 and output pressure p_3	≥ 6 bars
Lubricant	mineral oils, synthetic oils and ecofriendly oils
Lubricant temperature range	0 bis + 90 °C ¹⁾
Operating viscosity	20 bis 600 mm ² /s
Gear wheel-type flow indicator	
Sensor	Hall sensor
Power	24 V DC \pm 10%
Max. switched current	20 mA
Connection	plug DIN 43 650
Type of enclosure	IP 65
Proportionality factor	12.0 ml/Impuls

1) Only when ambient temperature < 60 °C

Mounting plate for a flow limiter with interchangeable strainer

Material	AlCuMgPb F38, neutrally anodized
Mesh spacing interchangeable strainer	0.1 mm
Weight	0.8 kg


Order number for a mounting plate with interchangeable strainer	
Description	Order no.
Mounting plate for a flow limiter with interchangeable strainer	24-0714-318

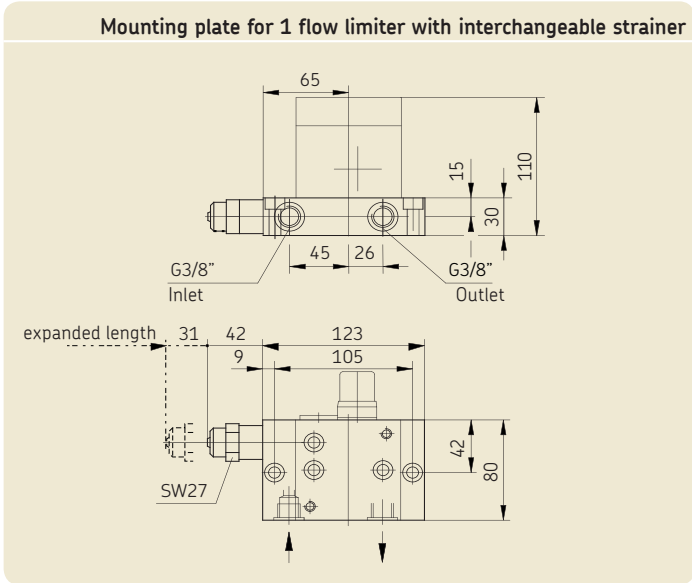

Mounting plate for 1 to 6 flow limiters and oil filter

Material	AlCuMgPb F38, neutrally anodized
Weight	see table

Order number for mounting plates without oil filter			
Number flow limiter[n]	Dim. A [mm]	Weight [kg/part]	Order no.
1	116	0.75	24-0714-3171
2	197	1.28	24-0714-3172
3	278	1.80	24-0714-3173
4	359	2.33	24-0714-3174
5	440	2.85	24-0714-3175
6	521	3.38	24-0714-3176

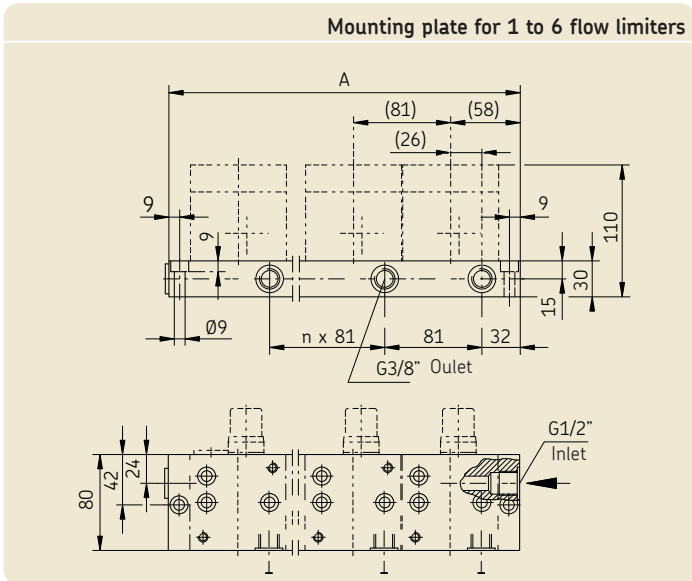


Mounting plate for 1 to 6 flow limiters and oil filter

Material AlCuMgPb F38,
neutrally anodized
Weight see table

Order number for mounting plate with oil filter

Number flow limiter[n]	Dim. A [mm]	Weight 1) [kg/part]	Order no.
1	175	1,0	24-0714-3181
2	256	1,5	24-0714-3182
3	337	2,0	24-0714-3183
4	418	2,5	24-0714-3184
5	499	3,0	24-0714-3185
6	580	3,5	24-0714-3186

1) without filter

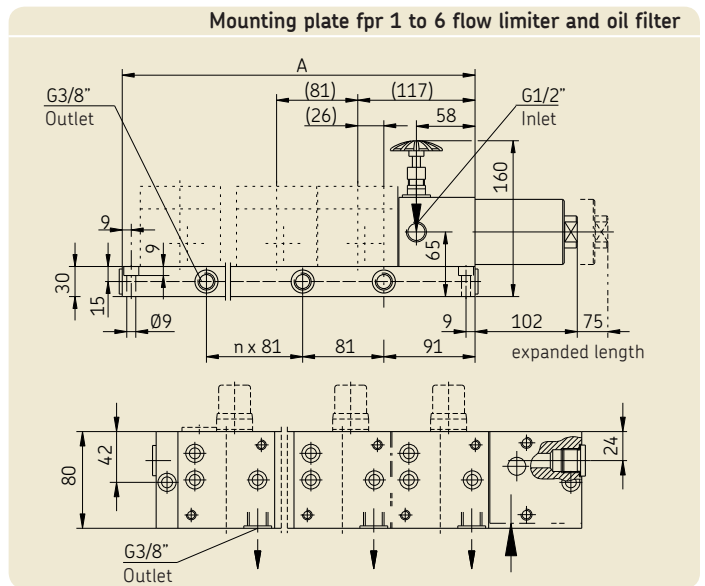


Oil filter with shut-off valve

Material AlCuMgPb F38,
neutrally anodized
Cloh. V4A
Mesh spacing interchangeable straine .. 0.1 mm
Weight 0.8 kg

Order number for oil filter with shut-off valve

Description	Order no.
Oil filter with shut-off valve	24-0651-3041

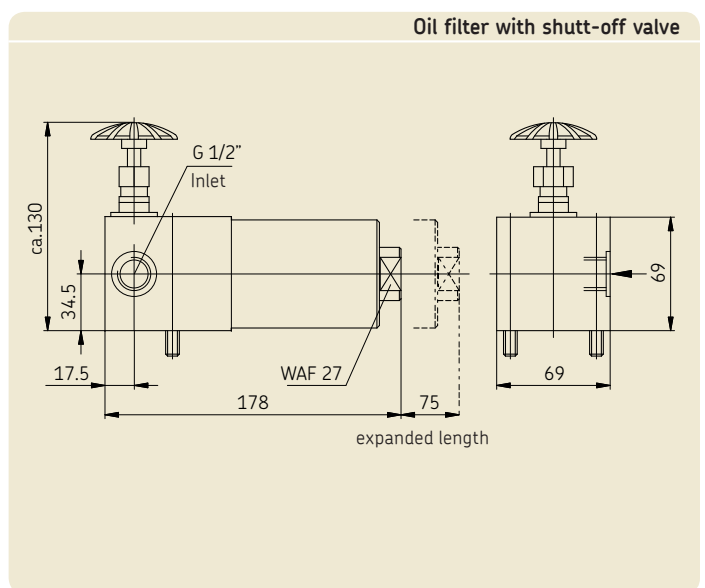

Dummy element for spare outlets

Material AlCuMgPb F38,
neutrally anodized
Model with mounting screws M 8x30
and sealing rings
Weight 0.8 kg

Order number for dummy element

Description	Order no.
Dummy element	24-0711-2405
Screw plug G 3/8" 1)	95-0038-0908

1) order 1 screw plug for a dummy element!

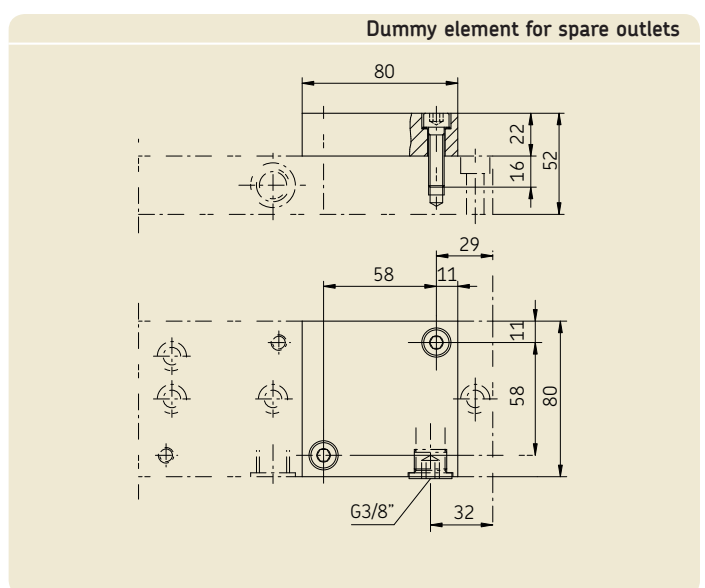


Table: Plug-in nozzles

Plug-in nozzles SP/SMB9							
Nominal volumetric ¹⁾ [l/min]	index nozzle	nozzle [Ø mm]	Spare Part complete Plug in nozzle D ₁	Nominal volumetric ¹⁾ [l/min]	index nozzle	nozzle [Ø mm]	Spare Part complete Plug in nozzle D ₁
0.09	040	0.40	24-0455-2572				
0.12	045	0.45	24-0455-2573	2.79	185	1.85	24-0455-2601
0.16	050	0.50	24-0455-2574	2.94	190	1.90	24-0455-2602
0.21	055	0.55	24-0455-2575	3.10	195	1.95	24-0455-2603
0.26	060	0.60	24-0455-2576	3.25	200	2.00	24-0455-2604
0.31	065	0.65	24-0455-2577	3.42	205	2.05	24-0455-2605
0.37	070	0.70	24-0455-2578	3.58	210	2.10	24-0455-2606
0.43	075	0.75	24-0455-2579	3.75	215	2.15	24-0455-2607
0.49	080	0.80	24-0455-2580	3.93	220	2.20	24-0455-2608
0.56	085	0.85	24-0455-2581	4.10	225	2.25	24-0455-2609
0.64	090	0.90	24-0455-2582	4.29	230	2.30	24-0455-2610
0.72	095	0.95	24-0455-2583	4.47	235	2.35	24-0455-2611
0.78	100	1.00	24-0455-2584	4.66	240	2.40	24-0455-2612
0.87	105	1.05	24-0455-2585	4.85	245	2.45	24-0455-2613
0.96	110	1.10	24-0455-2586	5.05	250	2.50	24-0455-2614
1.06	115	1.15	24-0455-2587	5.25	255	2.55	24-0455-2615
1.16	120	1.20	24-0455-2588	5.45	260	2.60	24-0455-2616
1.26	125	1.25	24-0455-2589	5.66	265	2.65	24-0455-2617
1.37	130	1.30	24-0455-2590	5.87	270	2.70	24-0455-2618
1.48	135	1.35	24-0455-2591	6.08	275	2.75	24-0455-2619
1.59	140	1.40	24-0455-2592	6.30	280	2.80	24-0455-2620
1.71	145	1.45	24-0455-2593	6.52	285	2.85	24-0455-2621
1.83	150	1.50	24-0455-2594	6.75	290	2.90	24-0455-2622
1.96	155	1.55	24-0455-2595	6.98	295	2.95	24-0455-2623
2.09	160	1.60	24-0455-2596	7.21	300	3.00	24-0455-2624
2.22	165	1.65	24-0455-2597	7.45	305	3.05	24-0455-2625
2.36	170	1.70	24-0455-2598	7.69	310	3.10	24-0455-2626
2.50	175	1.75	24-0455-2599	7.93	315	3.15	24-0455-2627
2.64	180	1.80	24-0455-2600	8.18	320	3.20	24-0455-2628

1) at a service viscosity of 300 mm²/s

Accessories/Replacement parts

Accessories

Designation	Order no.
Group monitorin unit	84-8011-0380
Group monitorin unit	
with electrical monitoring	84-8011-0390

Replacement parts

Designation	Order no.
Flow limiter	
SP/SMB9 without nozzle	
without electrical monitoring	24-1883-3012
SP/SMB9 without nozzle,	
with electrical monitoring	24-1883-3010
Gasket set for SP/SMB9.	24-0404-2340
Socket	179-990-034

Designation	Order no.
General	
Interchangeable stainer	24-1874-2104
Gasket set for	
Interchangeable stainer	24-0404-2117

Designation	Order no.
Oil filter with shut-off valve	
Filter insert	24-0651-2200
Gasket set for filter insert	24-0404-2293
Interchangeable stainer	24-2104-2009

Designation	Order no.
Gear wheel-type flow indikator	
Sight glass (with flange,	
seal and shims).	24-0758-2113

Note!

To order a flow limiter SP/SMB9, please generate both a type designation and an order number. The latter has to be adjusted according to the flow limiter version.

The order designation on page 6 shows how to create type designation and order number.

The necessary nozzle index can be taken from the table of plug-in nozzles SP/SMB9.

Key to order codes

Order example

Flow limiter design SP/SMB and size 9 (SP/SMB9) equipped with nozzle (2), with electrical volumetric flow check (E1), nozzle size Ø 1.80 mm with a volume flow of 2.64 l/min (180) gives the following:

Type designation: **SP/SMB9/2E1/180**
 as well as
 Order no.: **24-2709-1180**

Note

The flow limiter type SP/SMB9 is optionally available in ATEX designs:

-  Zone 1
-  Zone 21

with the following characteristics:

- Body design with ground clamp
- Typeplate extended
- Operating only with using a disconnecter unit
- available inclusive ATEX certificate

Further ATEX versions available on demand after consultation with SKF Lubrication Systems Germany AG.


Type designation:

SP/SMB9/2 .. /


Order number:

24-2709-

Configuration of type designation for flow limiter SP/SMB9

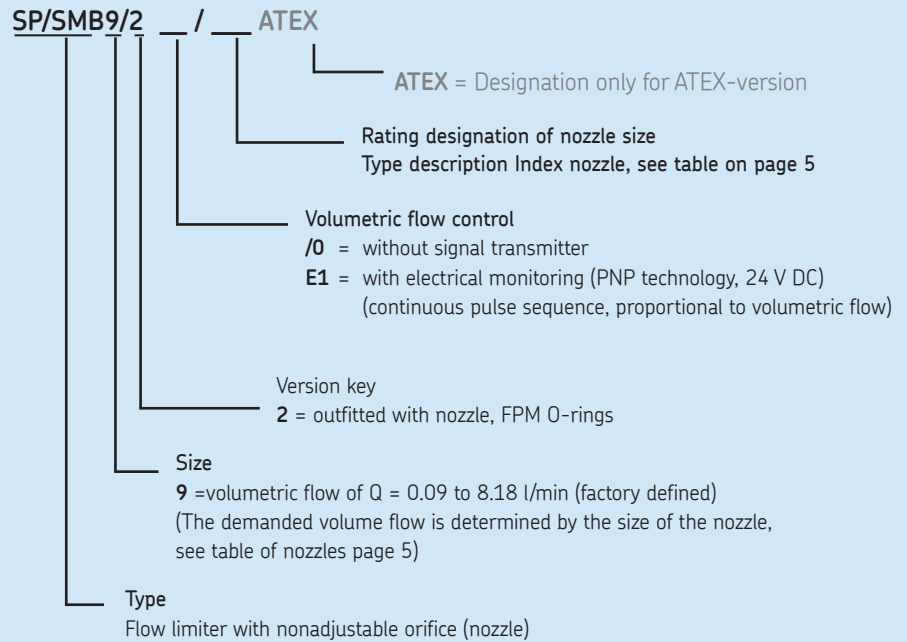

Configuration of order no. for flow limiter SP/SMB9


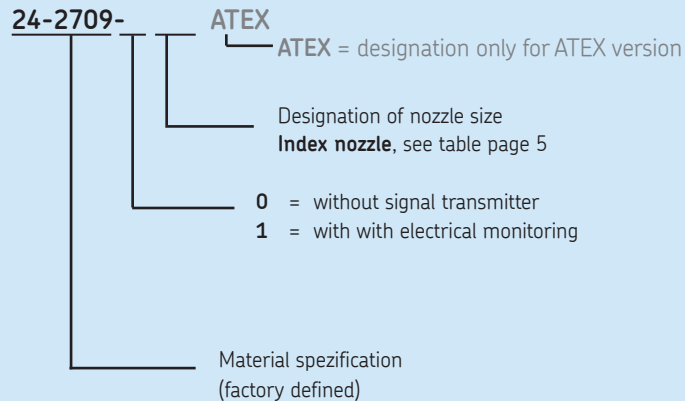


Example of an oil circular lubrication system

The pump (1) feeds the lubricant into the main line (2). From there the lubricant makes its way directly through the flow limiter (3) (and downstream progressive feeders (6)) as well as through the flow limiters (4) (including the downstream flow divider (5) and progressive feeders (6)) to the lube points. The electrical pulse generator built into the respective flow limiters (3) (4) checks the volumetric flow. Group monitoring units evaluate the incoming pulses (7).

Replacing plug-in nozzles

- Interrupt oil feed to flow limiter above shutoff valve (at oil filter, if required).
- ☞ Control piston held under spring pressure!
- **Slowly screw out** stop screw (hexagonal head, WAF 12) together with washer.
- ☞ **Burn injury hazard!**
Escaping oil is possibly hot!
- Remove control piston and pressure spring.
- Remove plug-in nozzle from control piston.
- ☞ A roughly $\varnothing 6$ mm rod (never use a pointed object like, for instance, a scriber) can be used to help press it out.
- Press new plug-in nozzle and washer into the control piston all the way to the stop.
- Insert the pressure spring in the borehole.
- Insert new plug-in nozzle into the borehole over the pressure spring without skewing.
- Check to make sure the control piston moves easily by pressing it against the pressure spring. Skewing leads to malfunctions.
- Screw in stop screw with washer.
- Open the shutoff valve

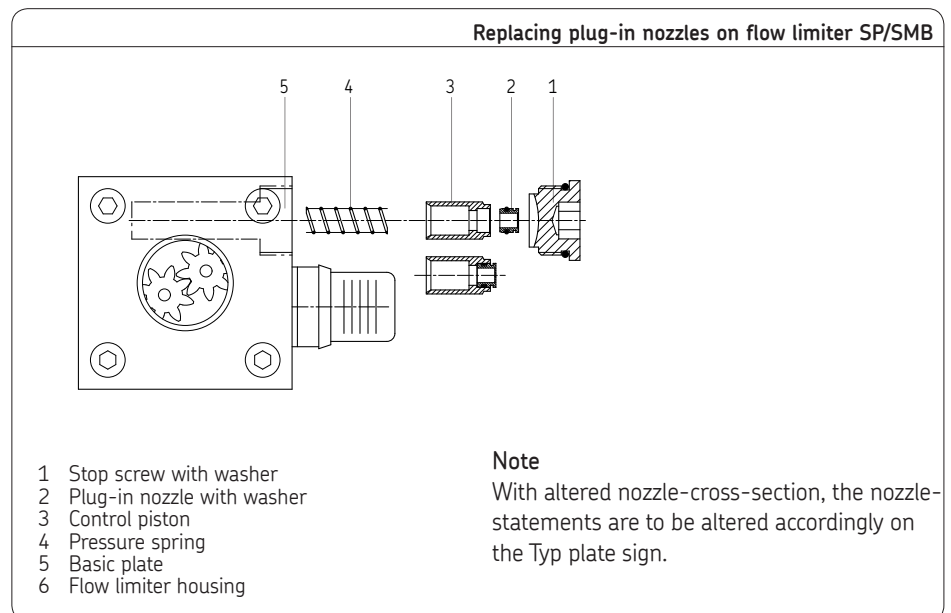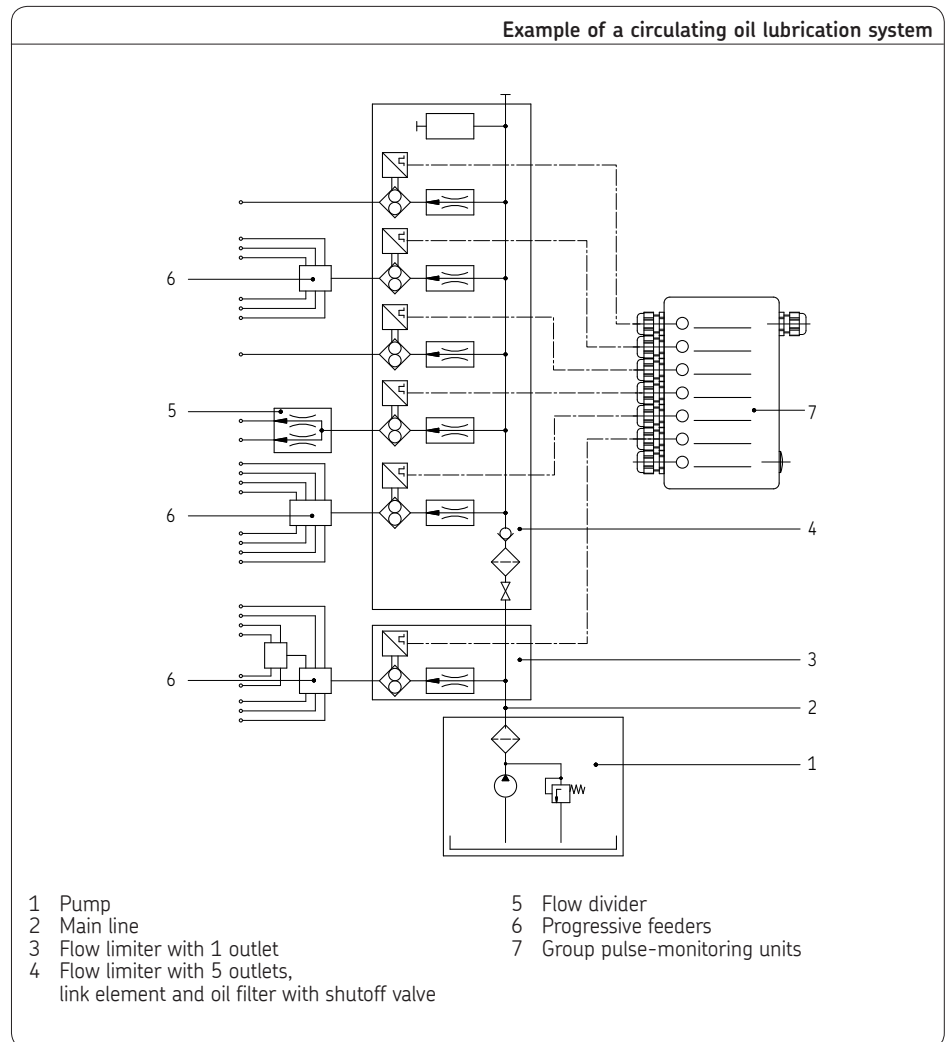

Order No. 1-3002-EN

Subject to change without notice! (07/2009)

Important product usage information

All products from SKF may be used only for their intended purpose as described in this brochure and in any instructions. If operating instructions are supplied with the products, they must be read and followed.

Not all lubricants are suitable for use in centralized lubrication systems. SKF does offer an inspection service to test customer supplied lubricant to determine if it can be used in a centralized system. SKF lubrication systems or their components are not approved for use with gases, liquefied gases, pressurized gases in solution and fluids with a vapor pressure exceeding normal atmospheric pressure (1013 mbars) by more than 0.5 bar at their maximum permissible temperature.

Hazardous materials of any kind, especially the materials classified as hazardous by European Community Directive EC 67/548/EEC, Article 2, Par. 2, may only be used to fill SKF centralized lubrication systems and components and delivered and/or distributed with the same after consulting with and receiving written approval from SKF.

Brochure note

1-3027-EN	Overview brochure - Flow limiter			
1-3001-EN	Flow limiter SP/SMB3	6	until 38 l/min	signal transmitter and proximity switch
1-3001-EN	Flow limiter SP/SMB6	25	until 132 l/min	signal transmitter and proximity switch
1-3028-EN	Flow limiter SP/SMB8	0.09	to 8.18 l/min	Sensor and piston detector
1-3003-EN	Flow limiter SP/SMB10	0.21	to 8.15 l/min	Gear wheel-type flow indicator
1-3004-EN	Flow limiter SP/SMB13	6	to 38 l/min	Gear wheel-type flow indicator
1-3005-EN	Flow limiter SP/SMB14	25	to 132 l/min	Gear wheel-type flow indicator
1-1730-EN	Electrical plug-in connections			

SKF Lubrication Systems Germany AG

2. Industriestrasse 4 · 68766 Hockenheim · Germany

Tel. +49 (0)62 05 27-0 · Fax +49 (0)62 05 27-101

www.skf.com/lubrication

This brochure was presented by:

® SKF is a registered trademark of the SKF Group.

© SKF Group 2009

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

