





noto courtesy of Group Sidel

Photo courtesy of Krones Inc.

SKF Dry Lubrication system for conveyors

Improve safety, quality and efficiency by eliminating water and soluble lubricants



SKF Dry Lubrication system for conveyors


The SKF Dry Lubrication system, using a special lubricant, has been developed to lubricate conveyor chain surfaces, as well as chain guides, for the transport of products in bottling and packaging unit.

The aim of the SKF Dry Lubrication system is to deliver automatically and precisely the right quantity at the right friction point (chain surface or guides) from a central unit. which can feed up to 200 lubrication points in accordance with the production process.

The association of this special lubricant and the SKF Dry Lubrication system replaces the classic wet lubrication systems. This lubricant, suitable for the food and beverage industry, leaves a dry film on the chain surfaces and guides for a better sliding quality.





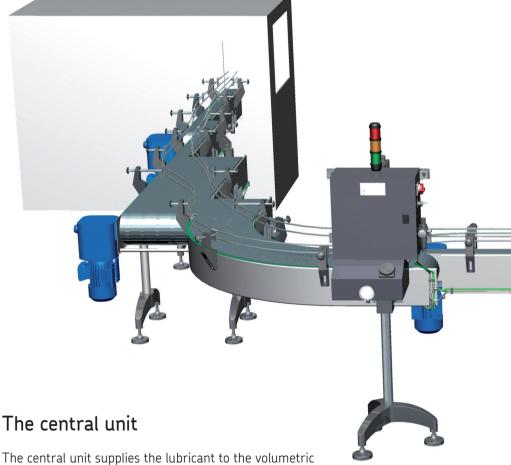




distributors via the primary circuits.

It comprises the pneumatically driven pump unit and the lubricant reservoir. A control unit is integrated in the central unit. It controls and monitors the whole lubrication system.

2 1-4123-EN

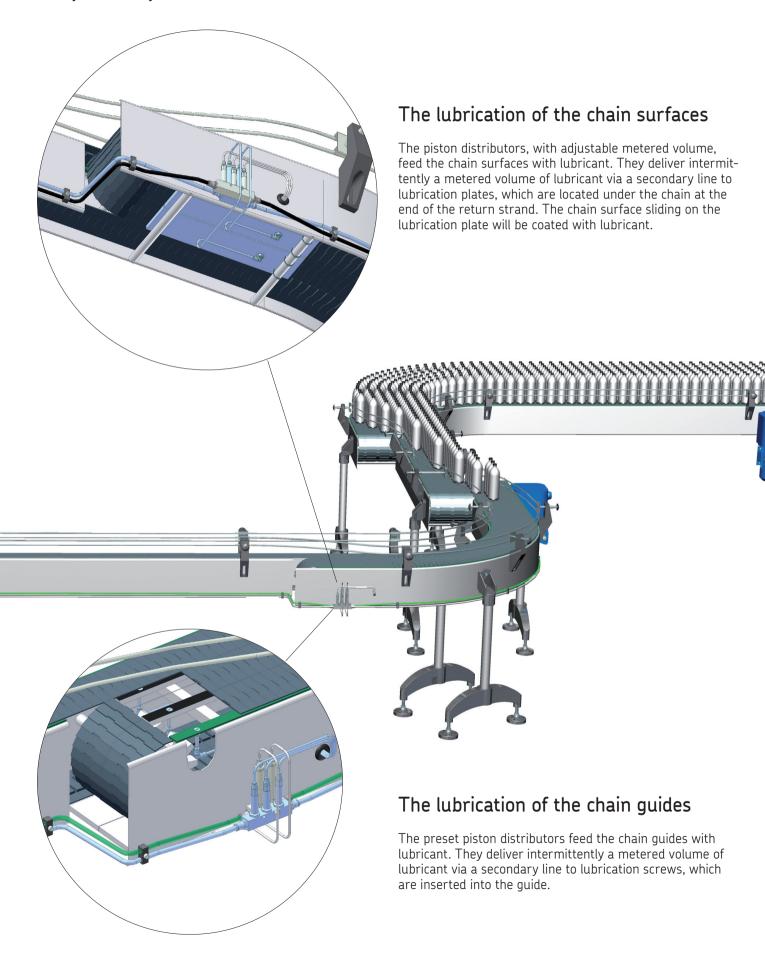

1-4123-EN 3

This brock	nure was pr	esented by:		

SKF Lubrication Systems France SAS

Rue Robert Amy, B.P. 70130 49404 Saumur cedex - France Tel. +33 (0)2 241 404 200 · Fax +33 (0)2 241 404 242 www.skf.com/lubrication

® SKF is a registered trademark of the SKF Group.

 $\ \ \,$ SKF Group 2009 The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

Order No.: 1-4123-EN (04/2009) Subject to change without notice!

